
hacona.com Go online, get closer and be inspired

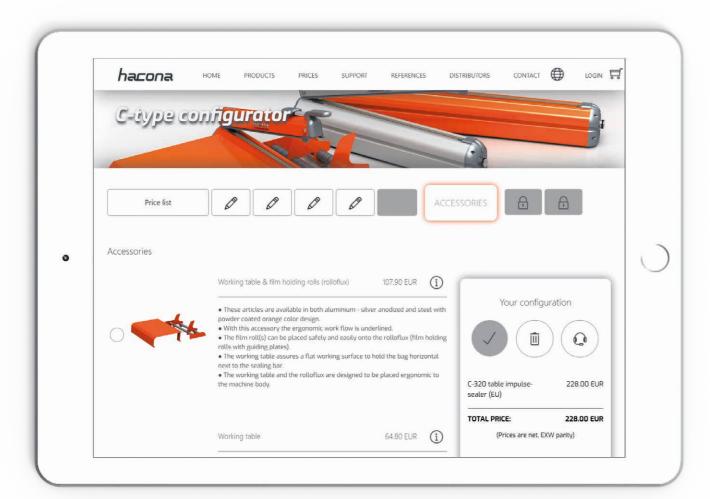

Technical data	C-220 / Cl-220	C-320 / Cl-320	C-420 / CI-420	C-620 / Cl-620	C-820 / CI-820
Max. sealing length (mm)	220	320	420	620	820
Sealing width (mm)	2.5				
Max. sealable film width (mm)	200	300	400	600	800
Max. cutting width [mm]	200	300	400	600	800
IP protection class (IP)	IP 23				
Electrical connection (V, Hz)	230, 50/60				
Max. power consumption* (W)	180	218	248	365	468
Size of machine WxDxH (mm)	400 x 95 x 300	520 x 95 x 300	630 x 95 x 300	840 x 95 x 300	1030 x 95 x 300
Weight of machine (kg)	3.30	3.80	4.40	5.10	7.20

 $^{^{\}star}$ while sealing (in standby mode, power consumes is 8 W for all types)

Electrical plug: EU plug standard; UK and USA plug as option available Power supply (V/Hz): 230 V 50/60 Hz standard; 110 V 50 Hz as option available

Details provided relating to the properties and use of the products are purely for information purposes and do not constitute a guarantee of these characteristics. The extent of goods delivered is determined by the subject matter of the specific contract. No liability accepted for errors or omissions. Subject to technical alterations.

Production and headquarter: Hacona Packaging Technology Kft. Bokenyfoldi ut 106., 1165 Budapest – Hungary

Tel.: +36 1 401 3030 Fax: +36 1 401 3031 E-mail: mail@hacona.com Web: www.hacona.com





C-type

Table top impulse heat sealers Premium quality. Reliable. Value for money.

DEDICATED TO SIMPLICITY

© Patent number: 001413108-0001, 002412007-0002, 001413108-0002, 002412007-0001, 001413108-0003

hacona®

Simple work **PERFECTLY** done


C-type heat sealers are very easy to operate and require minimal working space.

They are suitable for a wide range of packaging applications in production, order fulfillment and office environments. Simply connect to a 230 V power supply and they are ready to go.

The C-type machine range is produced in five sizes, with sealing lengths ranging from 220 mm to 820 mm.

SEALING & CUTTING EXPLANATION

(all sizes in mm)











INFINITE nossibilities

SIMPLE OPERATION

- Adjustable sealing time
- Sealing bar can be closed manually
- LED red / yellow light display for sealing
- 2.5 mm sealing width
- Integrated security cutting knife system

MACHINE SIZES

- C-220 220 mm (8 inch)
- C-320 320 mm (12 inch)
- C-420 420 mm (16 inch)
- C-620 620 mm (24 inch)
- C-820 820 mm (32 inch)

SAFETY is not on option for us



SAFETY CUTTING KNIFE SYTEM

- Solid built up
- Changeable cutting blade
- Dual edged blade

HIGH QUALITY SEALING



Sealing temperature 80-160 °C



Time controlled sealing

SURFACE FINISH



Orange painted – general industry Model: C-type



ACCESSORIES

- Working table
- Film roll with split roll technology
- Film roll with split roll technology and guiding plate
- Typical application: double working table and double film roll

SUITABLE FOR SEALING

- PE, PP, PA, PVC and other thin laminated films
- PE film, up to two layers of 200 microns

